




“RTE” REVERSIBLE TRIP EDGE BUTTERFLY PLOW SERIES

“QUALITY by DESIGN”

- ▶ Trip edge moldboard design with 10 gauge break formed skinplate, 36” high at center tapering upwards to 54” high at the discharge end.
- ▶ Moldboard reverses 35 degrees either side of the bull dose position.
- ▶ Two 3-1/2” diameter bore by 16” stroke reverse cylinders.
- ▶ Two point level lift chain arrangement or roller level lift arrangement available.
- ▶ Oscillator bar with 1” flame cut ears on 31” centers.

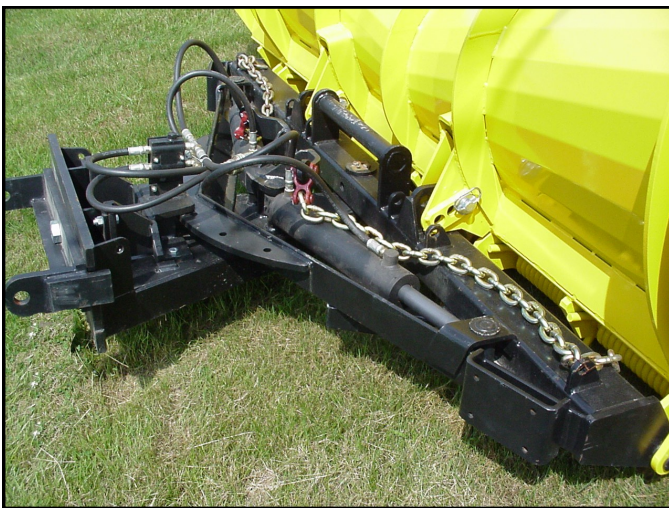

- ▶ Ram reverse or worm gear reverse options.
- ▶ 1/2” by 8” C-1085 cutting edge.
- ▶ Cutting edge backer angle shall be punched on 8” and 12” centers.
- ▶ Moldboard and curb shoes supplied standard.
- ▶ Optional carbide blades and carbide moldboard shoes.
- ▶ Optional mushroom shoes or 10” steel wheel caster assemblies available.

Model	Overall Length	Moldboard Height	Reverse Method	Cutting Edge Length	Moldboard Thickness
R132TEL3654S	132”	36”-54”	Hydraulic or	132”	10 Gauge
R144TEL3656S	144”	36”-56”	Worm Gear	144”	10 Gauge

Everest Equipment Co.
 1077 Westmount
 Ayer's Cliff, QC,
 Canada JOB 1C0
 Tel: (819)-838-4257
 Fax: (819)-838-5653
www.everestequipment.com



EVEREST EQUIPMENT CO.
 HEAVY- DUTY SNOW & ICE CONTROL

